


APPLICATION/INSTALLATION EXPANDING 8-WAY ANCHORS

ANCHOR APPLICATIONS	For distribution guying. Use to depths of 12 feet.
INSTALL IN THESE CLASS SOILS	Classes 3, 4, 5, 6 and 7 (100-600 inch-pound with the soil test probe)
INSTALLING EQUIPMENT REQUIRED	Hand or power auger. Expanding and tamping bar or mechanical tamper and shovel. (See page B-33)
LIMITATIONS ON USE	Depends on backfill effectiveness. Difficult to tamp in wet or plastic soil after rain. Seeping ground water can cut holding capacity 50 percent.

INSTALLATION GUIDE:


STEP #1

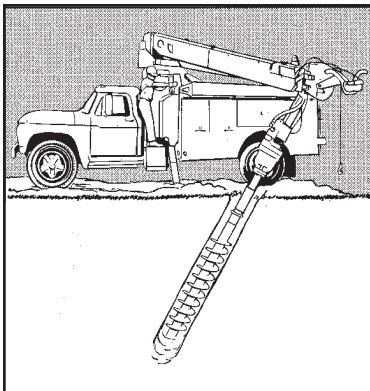

The hole should be drilled at a 45° to 60° angle in line with the guy.


NOTE: Hole size should be slightly larger than the unexpanded anchor. See chart on page B-17.

STEP #2

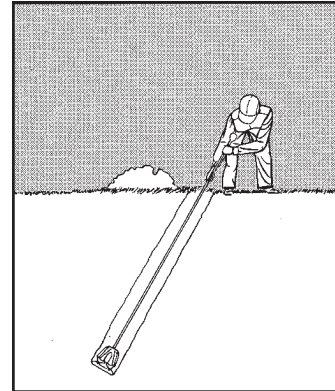

Attach rod to anchor and lower the assembly into the hole.


STEP #3

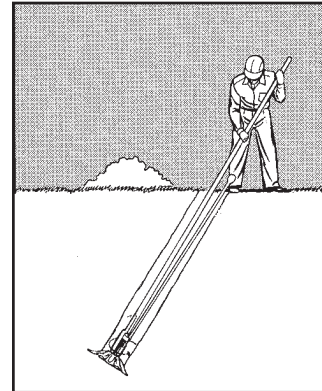

Expand the anchor with the expanding bar by striking the top plate.

NOTE: The expanding bar should be rotated around the anchor during the busting process.

STEP #4

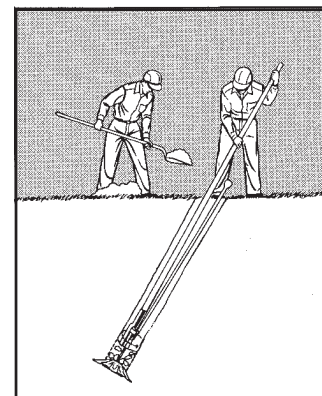

Backfill and tamp hole.